


**CP- UNC-DB21L3C-M****2MP Full HD IR Dome Camera - 30Mtr.****Main Features**

- 1/2.7" 2MP PS CMOS Image Sensor
- 25/30fps@1080P(1920x1080)
- Support Starlight Function
- H.265+ and H.264+Triple-stream encoding
- ROI, flexible coding, applicable to various bandwidth and storage environments
- DWDR, 3D-DNR, HLC, BLC, Digital watermarking, Rotation mode
- 2.8mm fixed lens (3.6mm optional)
- IR Range of 30 Mtrs, IP67, Micro SD Card, PoE
- Built-in Mic
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

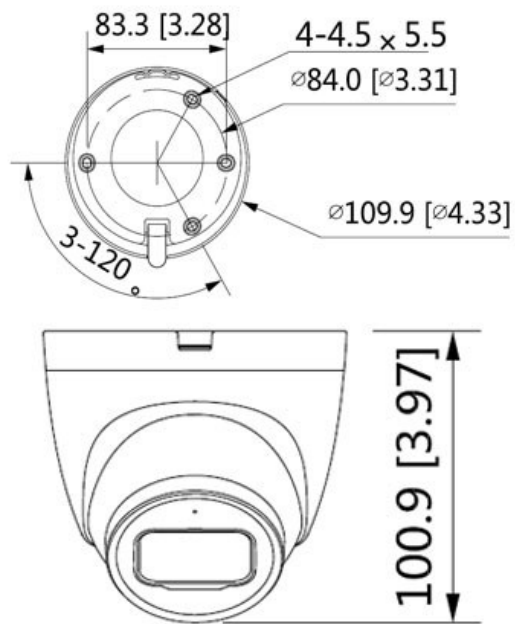

# CP- UNC-DB21L3C-M

## 2MP Full HD IR Dome Camera - 30Mtr.

### Feature

Image Sensor  
 Minimum Illumination  
 Effective Pixels  
 Shutter Speed  
 White Balance  
 Lens  
 Gain Control (AGC)  
 Video Compression  
 Angle of View  
 Back Light Compensation  
 Video Streaming  
 Resolution  
 Motion detection  
 Privacy Mask  
 ICR  
 ROI  
 Audio Compression  
 Audio  
 Bit Rate  
 Protocol  
 Smart Detection  
 Ethernet  
 Event Trigger  
 User Account  
 IR  
 Smart Phone  
 Micro SD  
 Storage Temperature

### Specification

1/2.7" 2MP Progressive scan CMOS  
 0.005 Lux @ F1.6  
 1920(H) x 1080(V)  
 Auto/Manual 1/3 s–1/100000 s  
 Auto/natural/street lamp/outdoor/manual/regional custom  
 2.8mm (3.6mm optional)  
 Auto/Manual  
 H.265+; H.265; H.264+; H.264; H.264B; MJPEG  
 2.8mm: H: 110.0° V: 59.0° D: 132.0°, 3.6mm: H: 91.0° V: 48.0° D: 109.0°  
 BLC / HLC / DWDR  
 (1920x1080@25/30fps), (704x576@25fps), (704x480@25/30fps)  
 1080P (1920 × 1080); 1.3MP (1280 × 960); 720P (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480); CIF (352 × 288/352 × 240)  
 Disable/Enable (4 areas, rectangle)  
 4 areas  
 ICR switch  
 Yes (4 areas)  
 G.711A; G.711Mu; G.726; AAC  
 Built-in Mic  
 H.264: 32 Kbps–6144 Kbps, H.265: 12 Kbps–6144 Kbps  
 HTTP; TCP; ARP; RTSP; RTP; UDP; RTCP; SMTP; FTP; DHCP; DNS; DDNS; PPPoE; IPv4/v6; QoS; UPnP; NTP; RTMP; Multicast; HTTPS; SFTP; 802.1x; ICMP; IGMP; ONVIF (Profile S/Profile G); CGI; Milestone; Genetec  
 Tripwire, Intrusion  
 RJ-45 (10/100Base-T)  
 Abnormality detection: Motion detection, video tempering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, voltage detection  
 20 Users  
 IR Range of 30 Mtr.  
 iPhone, iPad, Android Phone  
 FTP; Micro SD card (max. 256 GB); NFS  
 -40°C to +60°C (-40°F to +140°F)

 **CP- UNC-DB21L3C-M****2MP Full HD IR Dome Camera - 30Mtr.****Feature**

Operating Temperature  
Humidity  
Power Source  
Power Consumption  
Weatherproof Standard  
Casing  
Dimension  
Weight

**Specification**

-40°C~+60°C , Less than 95%RH  
≤95%  
DC12V, PoE  
1.7W (12V DC), 2.1W (PoE)  
IP67  
Metal + Plastic  
100.9 mm × Φ109.9 mm (3.97" × Φ4.33")  
0.39kg